
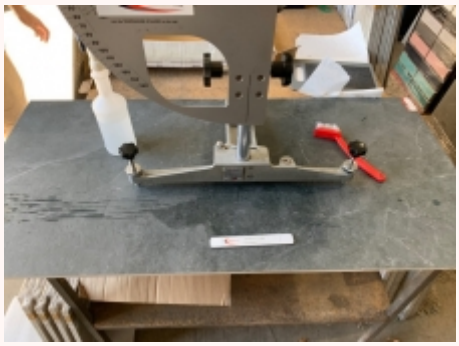
Sliptest Australia Pty Ltd
NATA Accreditation No: 15374
11 Fuchsia Way Gaven QLD 4211., Gaven, QLD, 4211
kathryn@sliptest.com.au
www.sliptest.com.au
1300 754 783

Stoneworld - 120x60 Amalfi Slipstop - Series - Wet Sliptest SN220420-12 22 Apr 2020

Slip Resistance Classification of New Pedestrian Surfaces - AS4586:2013 Appendix A

Date Tested:	22 Apr 2020
Test Report Number:	SN220420-12
Client Name & Address:	Stoneworld Queensland - 1/20-24 Riverland Dr LOGANHOLME Q4129
Test Site / Surface Tested :	120x60 Amalfi Slipstop - Series
Sample Information :	Samples and Test Information Supplied by Client
Wet Pendulum Test carried out using :	Slider 96 (4S) Rubber slider
Record ambient temperature (°C)	30
Testing Officer :	Shenea Neill
Testing Officer :	#1133 - 31.10.2019 - Munro-Stanley Portable Skid Tester
Testing Officer Signatory:	

Test Results :

Sample No.	Swing 1	Swing 2	Swing 3	Swing 4	Swing 5	Mean BPN of last 3 swings :	Surface Picture
GRIS	50	50	50	50	50	50	
ANTARTICA	55	55	53	53	53	53	

Submitted by: Shenea Neill @ 13:49:01 22 Apr 2020
Submission ID: 4403021
Environment friendly, paperless solution by www.formitize.com

Issue: Controlled Document ID: 23422 - 1 Version: 112
PAGE TEST FORM (AS4586 ONLY)
Author: Sliptest Australia Pty Ltd

Sample No.	Swing 1	Swing 2	Swing 3	Swing 4	Swing 5	Mean BPN of last 3 swings :	Surface Picture
BLANCO	56	56	55	55	55	55	

Variation to Standard Mean BPN Slip Resistance Value (SRV)	53
CLASSIFICATION using Slider 96 (4S Slider)	P4 = 45 - 54

Accredited for Compliance with ISO/IEC 17025. The information presented herein and on the Sliptest Report is copyright and is protected by copyright law, any reproduction of this information and test report except in full is prohibited. Sliptest Australia Pty. Ltd. performed this on site test with reference to the following Australian Standard testing criteria, of AS 4586:2013 Classification of new pedestrian surface materials. Appendix A – Wet Pendulum Test Method and Hand Book HB 198: 2014 with reference to AS/NZS 4663: 2004 Slip Resistance measurement of existing pedestrian surfaces and HB 197: 1999. These results to not account for Future Wear, Maintenance or Contamination of this surface once in-situ.

- **Page 1 of 1 - END OF REPORT**

stoneworld
NATIONWIDE TILES & SURFACES

1st September 2021

TO WHOM IT MAY CONCERN

Re : SLIP RESISTANCE CLASSIFICATION REPORT – Amalfi Matt SmoothGrip

Dear Sir / Madam,

Please find attached the Slip Resistance Classification Report for the Stoneworld tile Amalfi Matt SmoothGrip.

Please be aware that the attached test results are from the batch of tiles that were available at the time of testing. These test results are provided as an indication of slip rating as the slip rating may vary for each batch of tiles. Stoneworld provides slip rating test results as a guide ONLY and takes no responsibility for the slip rating of any non-tested batches, nor is it liable for any costs incurred in any further testing or re-testing of tiles.

The test result of tiles may change subsequent to delivery, through the laying process, during the completion of the building work, or through wear and tear.

Regards,

Alan Williams

GROUP NATIONAL MANAGER

10 YEAR WARRANTY